

## KEY FEATURES



### Grade 304 Stainless Steel Build

Tough, hygienic, and easy to clean



### Efficient Cooling

Secop compressor, Ventilated cooling, and Monoblock system for uniform temperature distribution



### Sleek and Practical

Self-closing door with flush handles and removable gasket



### Flexible Storage

PVC-coated grid adjustable shelves included



### Frost Free

Auto defrost system



### Easy Mobility

Heavy-duty caster wheels with brakes

This line of commercial refrigeration units features a sleek, all-stainless steel design built for durability, hygiene, and ease of maintenance perfect for demanding kitchen environments.



Copeland Digital Controller	<b>R134a</b> Chiller Refrigerant	<b>R404A</b> Freezer Refrigerant	<b>+43°C</b> High Ambient Temperature	<b>60mm</b> High Insulation Density
-----------------------------	-------------------------------------	-------------------------------------	--	--

## SPECIFICATIONS

### UPRIGHT



GN 2/1 Shelving System



#### GRN-600-CH

single door upright chiller



#### GRN-600-FR

single door upright freezer



#### GRN-1200-CH

two door upright chiller



#### GRN-1200-FR

two door upright freezer

	GRN-600-CH	GRN-600-FR	GRN-1200-CH	GRN-1200-FR
External Dimensions	660x830x2050	660x830x2050	1330x830x2050	1330x830x2050
Capacity	600L	600L	1200L	1200L
Shelf Pcs	3	3	6	6
Power	280W	510W	380W	750W
Voltage	220V	220V	220V	220V
Frequency	50/60Hz	50/60Hz	50/60Hz	50/60Hz
Temperature Range	0~-10°C	-18~-20°C	0~-10°C	-18~-20°C
Mode of Refrigeration	monoblock	monoblock	monoblock	monoblock
Packing Dimensions	720x890x2100	720x890x2100	1390x890x2100	1390x890x2100

# UNDERCOUNTER



GN 1/1  
Shelving System



**GRN-CC-2D-CH**  
two door  
undercounter chiller



**GRN-CC-2D-FR**  
two door  
undercounter freezer



**GRN-CC-3D-CH**  
three door  
undercounter chiller




**GRN-CC-3D-FR**  
three door  
undercounter freezer


External Dimensions	1250x700x850	1250x700x850	1700x700x850	1700x700x850
Capacity	280L	280L	480L	480L
Shelf Pcs	2	2	3	3
Power	220W	410W	250W	428W
Voltage	220V	220V	220V	220V
Frequency	50/60Hz	50/60Hz	50/60Hz	50/60Hz
Temperature Range	0~-10°C	-18~-20°C	0~-10 °C	-18~-20°C
Mode of Refrigeration	monoblock	monoblock	monoblock	monoblock
Packing Dimensions	1310x760x890	1310x760x890	1760x760x890	1760x760x890

Optional:


Each drawer can be replaced with 2 or 3 drawer set




GRN-600-CH / GRN-600-FR

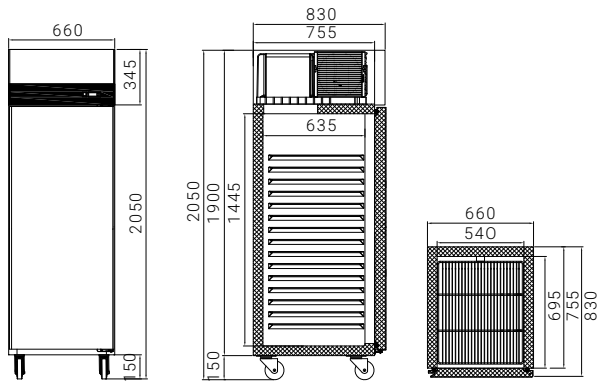

GRN-1200-CH / GRN-1200-FR

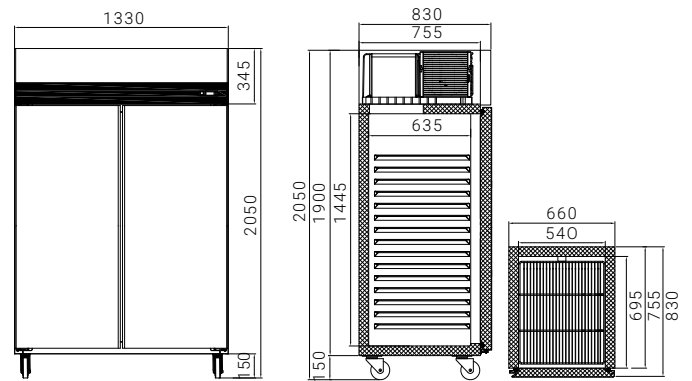

GRN-CC-2D-CH / GRN-CC-2D-FR

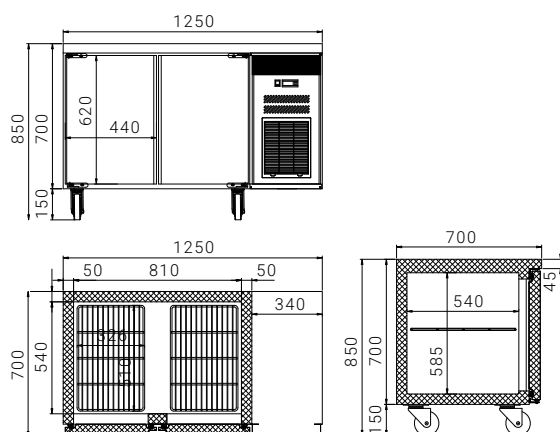

GRN-CC3D-CH / GRN-CC-3D-FR

