

KEY FEATURES



Sturdy Design

Tough and practical design with low-maintenance condenser



Efficient Cooling

Ventilated cooling for uniform temperature distribution



Easy Monitoring

Hinged glass door for easy viewing



Controlled Access

Door with built-in lock for added safety



Flexible Storage

PVC-coated grid adjustable shelves included



Adaptable Base

Hassle-free leveling with four adjustable feet



Digital Controller

R600a

Refrigerant

+32°C

Ambient Temperature

35mm

Insulation Density

SPECIFICATIONS



ALT-B00-1-BL

single door
bottle cooler



ALT-B00-2-BL

two door
bottle cooler




ALT-B00-3-BL


three door
bottle cooler

External Dimensions	600×535×870mm	900×535×870mm	1350×535×870mm
Capacity	129L	202L	320L
Shelf Pcs	2 (520×316mm)	4 (406×316mm)	4 (406×316mm) 2 (446×316mm)
Power	110W	112W	140W
Voltage	220V	220V	220V
Frequency	50Hz	50Hz	50Hz
Temperature Range	+2~+8°C	+2~+8°C	+2~+8°C
Mode of Refrigeration	Built-in	Built-in	Built-in
Packing Dimensions	657×570×1040mm	960×570×1040mm	1405×570×1040mm

ALT-BOO-1-BL

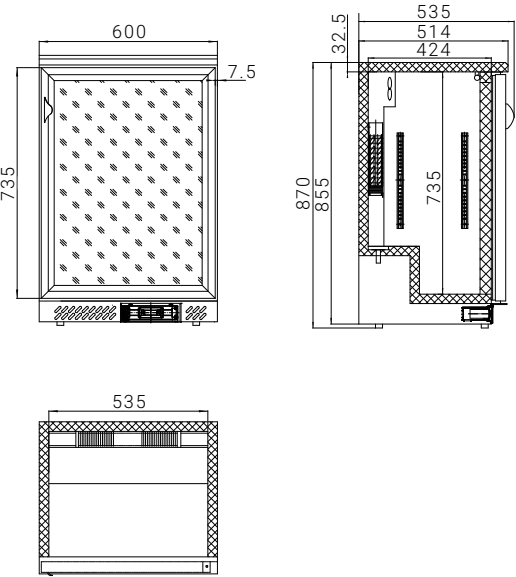

ALT-BOO-2-BL

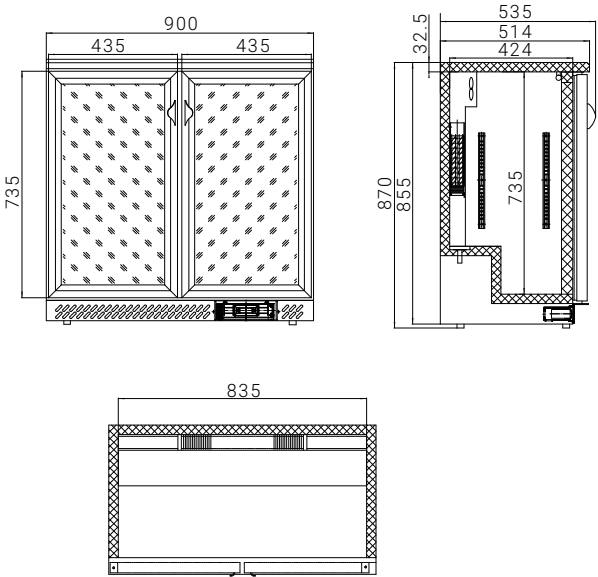

ALT-BOO-3-BL

