

KEY FEATURES



Grade 304 Stainless Steel Build

Tough, hygienic, and easy to clean



Uniform Temperature Distribution

Heated trolleys circulate warm air, while cold trolleys maintain chilled airflow



Sleek and Practical

Self-closing door with flush handles and removable gasket



Ergonomic Side Handles

For easy pushing and maneuvering



Ready to Use

Supplied with standardized Gastronorm pans for immediate service use



Easy Mobility

Heavy-duty caster wheels with brakes

This line of banquet trolleys includes both cold and heated models, designed to keep food fresh or hot as needed, with durable stainless steel construction and smooth mobility for reliable catering service.



Copeland Digital Controller (cold variants)

R600a

Refrigerant (cold variants)

+40°C

High Ambient Temperature

60mm

High Insulation Density

SPECIFICATIONS

Cold Banquet Trolley

Shelving System (20 layers)



GN 1/1 for 290 models



GN 2/1 for 540 models



ALT-CBT-290

single door cold banquet trolley



ALT-CBT-540

single door cold banquet trolley



ALT-CBT2-540

two door cold banquet trolley

External Dimensions	672x831x2030mm	877x951x2030mm	1627x951x2030mm
Capacity	290L	540L	1300L
GN Pans Pcs	20	20	40
Power	220W	260W	360W
Voltage	220V	220V	220V
Frequency	50/60Hz	50/60Hz	50/60Hz
Temperature Range	-2~+8°C	-2~+8°C	-2~+8°C
Mode of Refrigeration	built-in	built-in	built-in
Packing Dimensions	595x856x2090mm	800x976x2090mm	1500x976x2090mm

HEATED BANQUET TROLLEY

Shelving System (20 layers)



GN 1/1 for 290 models



GN 2/1 for 540 models



ALT-HBT-290

single door heated banquet trolley



ALT-HBT-540

single door heated banquet trolley




ALT-HBT2-540

two door heated banquet trolley


External Dimensions	672×830×1776mm	877×950×1430mm	1627×950×1776mm
Capacity	290L	540L	1300L
GN Pans Pcs	20	20	40
Power	800W	1250W	1100W
Voltage	220V	220V	220V
Frequency	50Hz	50Hz	50Hz
Temperature Range	+30~+90°C	+30~+90°C	+30~+90°C
Packing Dimensions	595×840×1840mm	800×960×1840mm	1500×960×1830mm

*Automatic safety cut-out prevents overheating 120°C


ALT-CBT-290

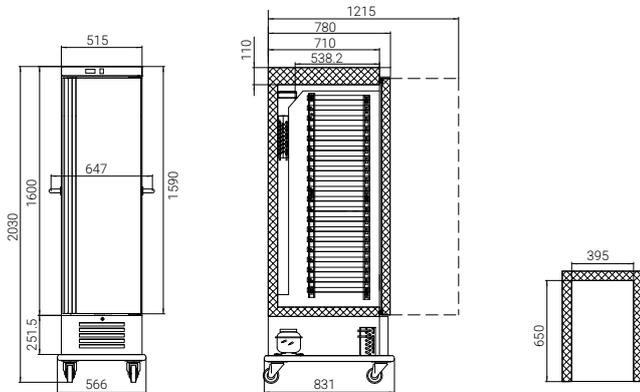


ALT-CBT-540

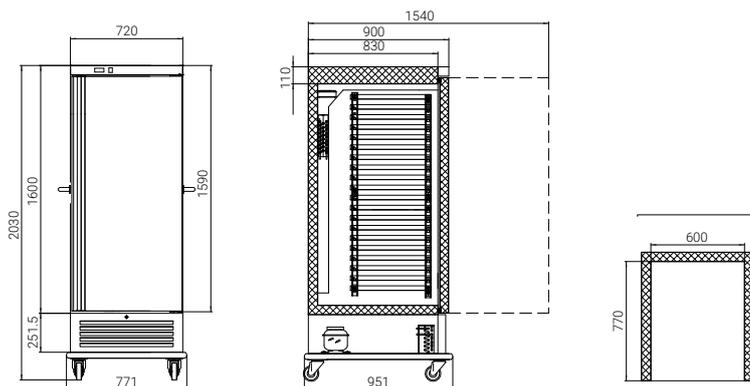


ALT-CBT2-540

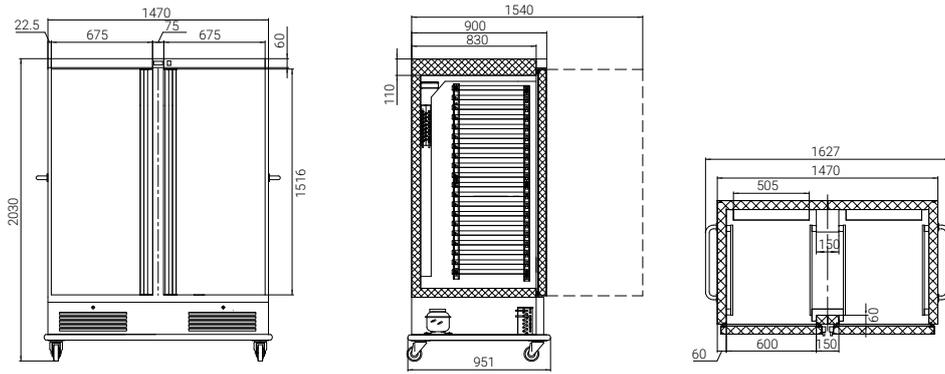

ALT-HBT-290

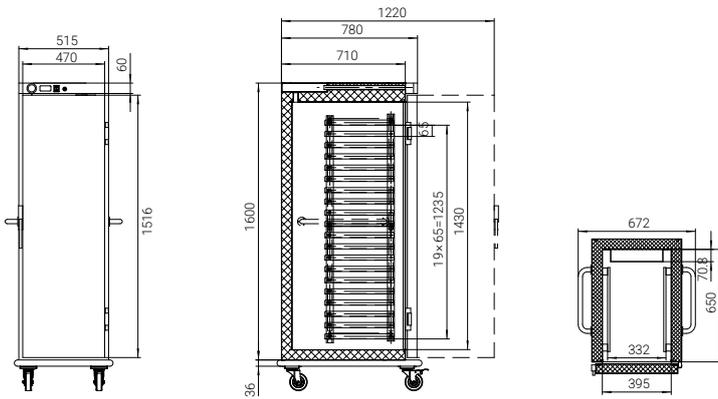

ALT-HBT-540

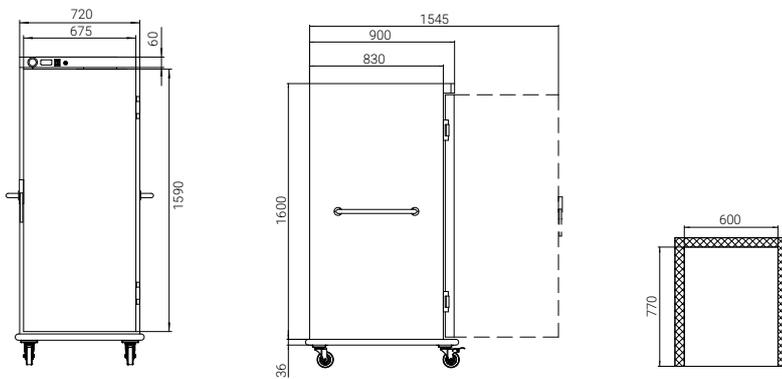

ALT-HBT2-540

